


SPRAY MASTER® V350 AMP MIG GUN



80% Duty Cycle—Mixed Gases
Suitable for Medium/Heavy Duty Fabrication.

WELDING PROCESSES:

MIG (GMAW), Flux Cored (FCAW), Aluminum (GMAW)

Standard Options Include:

- Dual Schedule On/Off Control, Rear Connector and Knucklehead™ Flexible Conductor Tube
- Standard Conductor Tube—SMVCTLS60 (Stock No. 1240-1377) on all guns up to 15ft (4.6 m)
- SMVCTLS45 (Stock No. 1240-1376) on all guns over 15ft (4.6 m)
- Conduit Liner—44 Series

Tweco® Style Rear Connector

Adapter kits are available to fit Tweco rear connection to most wire feeders

WIRE SIZE	LENGTH	PART NO.	STOCK NO.
Up To 1/16" (1.6 mm)	10 ft (3 m)	SMV310-116	1036-1750
	12 ft (3.6 m)	SMV312-116	1036-1752
	15 ft (4.6 m)	SMV315-116	1036-1756
	15 ft (4.6 m)	SMV315-116DSRS	1036-1783
	15 ft (4.6 m)	SMV315-116K4	1036-1759
	20 ft (6.1 m)	SMV320-116	1036-1789
	25 ft (7.6 m)	SMV325-116	1036-1787

Lincoln® Style Rear Connector

Fits Lincoln LN7, 8, 9, SP200

WIRE SIZE	LENGTH	PART NO.	STOCK NO.
Up To 1/16" (1.6 mm)	10 ft (3 m)	SMV310L-116	1036-1785
	12 ft (3.6 m)	SMV312L-116	1036-1753
	15 ft (4.6 m)	SMV315L-116	1036-1762
	15 ft (4.6 m)	SMV315L-116DSRS	1036-1788
	15 ft (4.6 m)	SMV315L-116K4	1036-1764
	20 ft (6.1 m)	SMV320L-116	1036-1781
	25 ft (7.6 m)	SMV325L-116	1036-1786

Some Lincoln wire feeders are assembled with their K1500-2 gun receiving bushing that will accept Tweco Style MIG Guns direct from the factory. Control wire Part No. MS354-DSLJ (Stock No. 2060-2137) must be ordered separately.

Miller® Style Rear Connector

WIRE SIZE	LENGTH	PART NO.	STOCK NO.
Up To 1/16" (1.6 mm)	10 ft (3 m)	SMV310M-116	1036-1751
	12 ft (3.6 m)	SMV312M-116	1036-1754
	15 ft (4.6 m)	SMV315M-116	1036-1765
	15 ft (4.6 m)	SMV315M-116K4	1036-1768
	15 ft (4.6 m)	SMV315M-332K4	1036-1791
	15 ft (4.6 m)	SMV315M-116CT180	1036-1777
	20 ft (6.1 m)	SMV320M-116	1036-1780
	25 ft (7.6 m)	SMV325M-116CT180	1036-1778
	25 ft (7.6 m)	SMV325M-116	1036-1775


Euro-Kwik Style Rear Connector

WIRE SIZE	LENGTH	PART NO.	STOCK NO.
Up To 1/16" (1.6 mm)	10 ft (3 m)	SMV310X-116	1036-1784
	12 ft (3.6 m)	SMV312X-116	1036-1779
	15 ft (4.6 m)	SMV315X-116	1036-1770
	20 ft (6.1 m)	SMV320X-116	1036-1782
	25 ft (7.6 m)	SMV325X-116	1036-1790

"DSRS" = Dual Schedule Rocker Switch; "K4" = Knucklehead Conductor Tube

Knucklehead Conductor Tube Part No. VCTL64SFLX480 (Stock No. 1640-1337)
Part No. VCTL64SFLX360 (Stock No. 1640-1336)

Long Reach Conductor Tube Part No. SMVCTLS60LM (Stock No. 1640-1403)
Part No. SMVCTLS45LM (Stock No. 1640-1402)

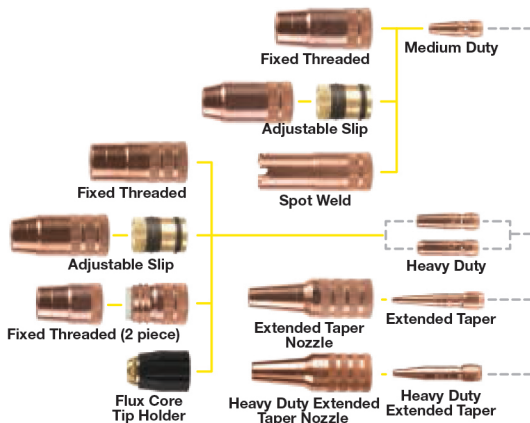

RATED OUTPUT			WIRE SIZE	COOLED	APPLICATION USAGE
Amps	Duty Cycle	Gas			
350 Amps	80%	Mixed	Up To 1/16" (1.6 mm)	Air	Medium/Heavy Duty Fabrication